


## Contents

2x Steel brackets  
2x Support clips  
2x Washers  
2x Plastic wheels  
2x Axle bolts  
2x Nyloc axle nuts  
2x Axle cylinders  
2x Plastic protection covers

2 Adjustable wrenches  
required (not included)




**1** Insert the axle bolt through axle cylinder then through plastic wheel and through the correct hole of the steel bracket



Replace the bicycle axle nut and tighten securely. The training wheels must have 6-10mm from the ground

Axle nut must be fully engaged on the axle. If this is not the case then an axle extender may be required (available separately)

Place steel bracket with wheel assembly on to the bicycle wheel axle through the hole & support clip over the steel bracket

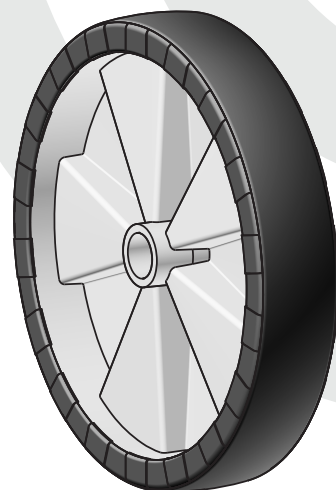

**4**

**2**

Place the washer and tighten with nyloc axle nut securely

**5**

**6**

Place the plastic protection cover at the top of the steel bracket

**3**

Remove bicycle wheel axle nut from the rear wheel of the cycle

## WARNING!

MAKE SURE THAT THE TRAINING WHEELS ARE FIXED PROPERLY BEFORE EVERY RIDE.

## IMPORTANT

- ALL FASTENERS MUST BE CHECKED CAREFULLY TO ENSURE THEY ARE SECURE.
- THE STABILIZERS REQUIRE 20MM OF FREE AXLE LENGTH ON EACH SIDE OF THE CYCLE FOR A CORRECT FIT.
- CHOOSE THE CORRECT SIZE OF THE WHEEL (SEE PICTURE).

**GC ACCESSORIES®**

INSTALLATION MANUAL FOR  
**TRAINING WHEELS**  
**12"**

MADE IN GREECE

ΒΙΟΤΕΧΝΙΑ ΠΛΑΣΤΙΚΩΝ ΕΙΔΩΝ, ΣΧΑΡΕΣ ΠΟΔΗΛΑΤΟΥ - ΑΥΤΟΚΙΝΗΤΟΥ  
ΛΕΩΦΟΡΟΣ Κ. ΚΑΡΑΜΑΝΛΗ 220 ΑΧΑΡΝΕΣ, Τ.Κ. 13678